


LIFT COMPONENTS INDEX

PAGE	DATE	SERIES	DESCRIPTION
L-1	06/03/10		Lift Components Index
L-2	04/27/01	L01	Die Lift Pin With Spring Retainer Ring
L-3	01/03/95	L11	Casting Liner For Die Lift Pin
L-4	06/03/10	L31	Eye Bolt Inserts

DIE LIFT PIN WITH SPRING RETAINER RING

(L01 SERIES)

GLOBAL STANDARD COMPONENTS
NAAMS 
TM Stamping 04/27/01

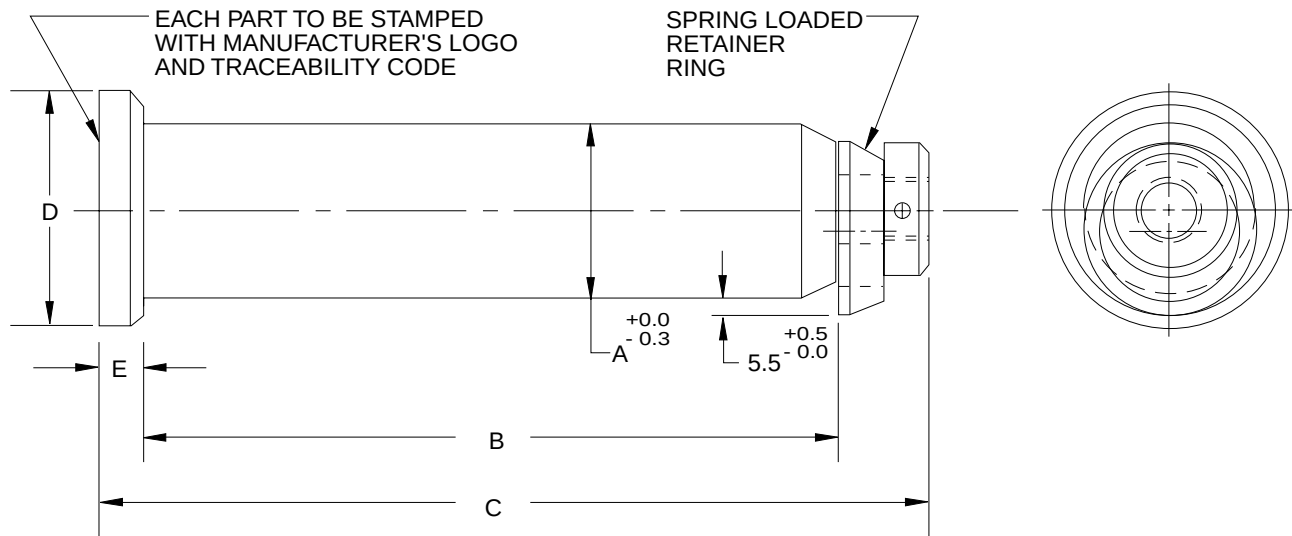

A

NAAMS CODE	A DIA.	B	C	D	E
L013512	35	125	165	45	10
L015019	50	190	230	63	10
L016328	63	280	320	76	10
L018032	80	320	370	89	15

NOTES & SPECIFICATIONS:

Material, steel

Tensile strength 965 MPa (140 ksi)

Yield strength 860 MPa (125 ksi)

CASTING LINER FOR DIE LIFT PIN


(L11 SERIES)

GLOBAL STANDARD COMPONENTS



Stamping

01/03/95

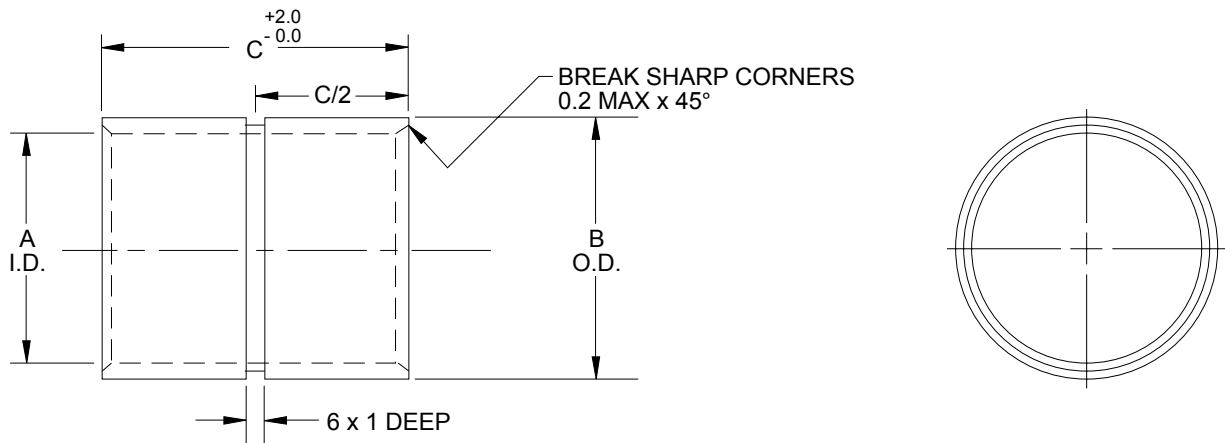

NAAMS CODE	LIFT PIN DIA.	A I.D.	B O.D.	C	EQUIVALENT TUBE - INCHES	
					O/S DIA.	WALL THK.
L115050	50	52	60	50	2-3/8	.156
L116380	63	65	73	80	2-7/8	.156
L118010	80	83	92	100	3-5/8	.188

NOTES & SPECIFICATIONS:

Material, steel

EYE BOLT INSERTS



(L31 SERIES)

GLOBAL STANDARD COMPONENTS


TM **NAAMS** 

Stamping

06/03/10

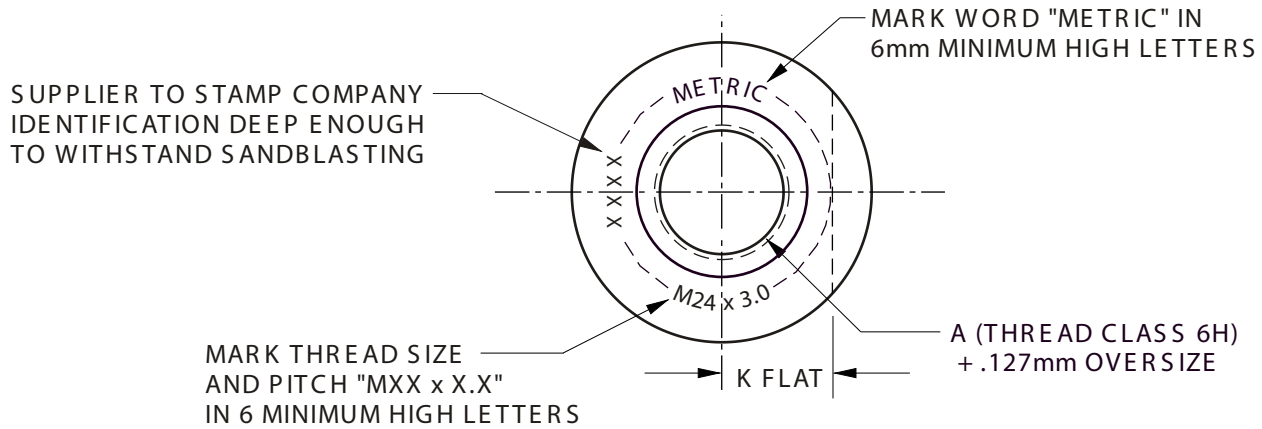

FOR L314850
ONLY

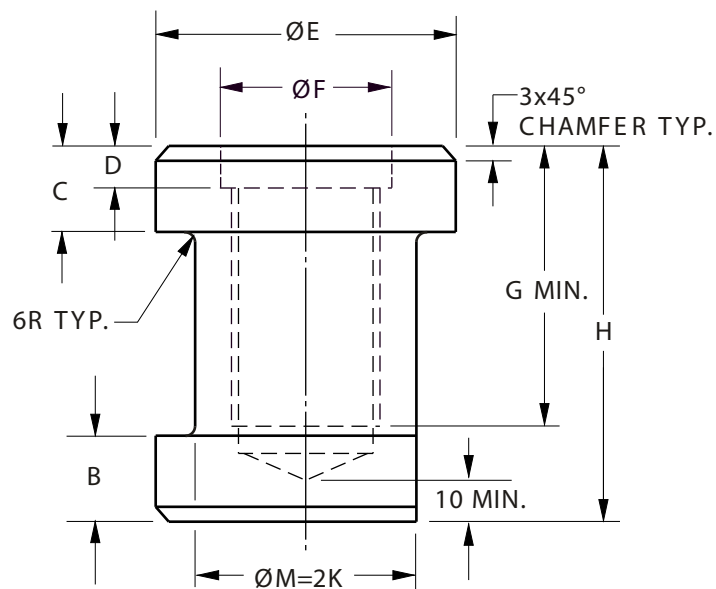

NAAMS CODE	A	B	C	D	ØE	ØF	G	H	ØM	K FLAT
L311672	M16 x 2.0	16	12	7	45	18	42	72	32	16
L312080	M20 x 2.5	16	12	8	50	22	50	80	36	18
L312288	M22 x 2.5	16	12	9	54	26	54	88	42	21
L312488	M24 x 3.0	16	12	9	54	26	54	88	42	21
L313000	M30 x 3.5	20	20	10	70	33	70	100	50	25
L313612	M36 x 4.0	22	22	10	80	39	82	112	60	30
L314850	M48 x 5.0	30	30	-	108	60	110	150	80	40

NOTES & SPECIFICATIONS:

Material: AISI-1144 Fatigue Proof or 4140 quenched & tempered to minimum tensile strength of 950 MPa and yield strength of 834 MPa and a hardness of 29-35 Rockwell "C".

NO SUBSTITUTIONS ALLOWED